

A man with dark hair, wearing sunglasses and a light blue polo shirt, is leaning out of the driver's side window of a bright blue convertible car. He is smiling and looking towards the camera. The background is a blurred field of tall grass under a clear sky. A yellow triangle is positioned in the upper right corner of the white banner containing the logo.

**PRIMEWELL**

**Passenger Car,  
SUV/4x4, and Light Truck**  
Product Guide

**2015-2016**



**PRIMEWELL**

Whether you are looking for performance car,  
passenger vehicle, or commercial van tire,  
we've got the product to suit your lifestyle

# CONTENTS

---

Corporate Social Responsibility	1
Why Buy Primewell?	2
<b>Sport 910</b> Ultra High Performance	3
<b>All Season</b> All-Season capability	5
<b>Valera Sport<sup>AS</sup></b> Sport Performance	7
<b>PS880</b> Incredible Handling	9
<b>PS870</b> Everyday Comfort	11
<b>Valera SUV</b> High Performance SUV	13
<b>Valera AT</b> All-Terrain	15
<b>Valera HT</b> Enjoy Life's Everyday Expeditions	17
<b>PV600</b> Maximum Load And Optimum Mileage	19
Size Chart	21
Designation Load and Speed Index	25



## Corporate Social Responsibility

We take responsibility for our environment with:

- Conservation programmes to offset carbon emissions and promote sustainable development
- Commitment to the development of environmentally friendly products
- ISO 14001 environmental management system certification
- Partnership with Conservation International

# Why Buy PRIMEWELL?

**PRIMEWELL** takes pride in being at the forefront of new technology, constantly seeking new ways to improve the driving experience. These advances are made while always keeping the needs of various types of drivers in mind. Only after thorough research, analysis, and testing, the tires are developed for local markets depending on their specific conditions and requirements.

**PRIMEWELL** is fully committed to maintaining the very highest standard of quality control procedures and has obtained ISO9001:2000 and ISO/TS16949:2009 accreditation for all manufacturing plants. In addition, the facilities have also obtained ISO14001-2004 Environmental Management System Accreditation.

All passenger tires produced by PRIMEWELL are designed to meet or exceed the standards for all legal directives, regulations and standards. E-mark Safety and Noise Certification tests are performed and accredited by top level global and local organizations.

**PRIMEWELL's** research and development efforts have enabled the development of high quality global tires, and have also helped improve product design and production technology in maintaining a leading market position. In addition to in-house research and development capabilities, PRIMEWELL also collaborates with various leading universities and top research institutions, including the National Quality Examination Centre for Rubber Tire, Smithers Research Laboratories in the USA, and TUV Automotive GmbH Tire/Wheel Test Centre in Germany.

**PRIMEWELL** has also made a significant investment in its own tire testing facility, the European Technical Centre (ETC), which is located at the internationally acclaimed MIRA Ltd. (Motor Industry Research Association). The ETC provides development and evaluation capacity to PRIMEWELL's Research and Development Centre. The facility focuses on the development of quality tire products for worldwide applications in both the replacement and original equipment markets.

---

Cutting-edge products designed with our drivers' needs in mind.

- There are more than 600 internationally experienced engineers in research and development that achieve peak performance and develop top quality products.
- Five high-tech research centers and four testing facilities ensure optimization and performance of our tires in all conditions.

# Sport 910

ULTRA HIGH PERFORMANCE



## FEATURES

Rigid shoulder blocks

New advanced silica compound

Four longitudinal grooves featured in pattern

Optimized variable-pitch design

Central rib design

## BENEFITS

- ▶ Better handling and reduced movement during cornering
- ▶ Improved grip in both wet and dry conditions keeps you safe
- ▶ Improves water evacuation and wet performance
- ▶ Reduced noise for a quieter ride design
- ▶ Improved high-speed stability



Sports



Water Evacuation



Handling



Asymmetrical



Sport 910 series : **35 40 45 50 55**

Sport 910 series : **35 40 45 50 55**

ULTRA HIGH  
PERFORMANCE

**Sport 910**

Inch	Series	Size	Load Index	Speed Rating	UTQG	Tread Depth mm	Overall Diameter mm	Side Wall
<b>20</b>	35	255/35ZR20	97	W	280 AA A	7.0	686	BSW
<b>19</b>	35	245/35ZR19	93	W	280 AA A	7.0	655	BSW
	35	235/35ZR19	91	W	280 AA A	7.0	647	BSW
<b>18</b>	35	255/35ZR18	94	W	280 AA A	7.0	635	BSW
	40	245/40ZR18	97	W	280 AA A	7.0	653	BSW
	40	235/40ZR18	95	W	280 AA A	7.0	645	BSW
	40	225/40ZR18	92	W	280 AA A	7.0	637	BSW
	45	245/45ZR18	100	W	280 AA A	7.0	677	BSW
	45	225/45ZR18	95	W	280 AA A	7.0	659	BSW
	<b>17</b>	40	245/40ZR17	91	W	280 AA A	7.0	628
40		215/40ZR17	87	W	280 AA A	7.0	604	BSW
40		205/40ZR17	84	W	280 AA A	7.0	596	BSW
45		245/45ZR17	99	W	280 AA A	7.0	652	BSW
45		235/45ZR17	97	W	280 AA A	7.0	644	BSW
45		225/45ZR17	94	W	280 AA A	7.0	634	BSW
45		215/45ZR17	91	W	280 AA A	7.0	626	BSW
45		205/45ZR17	88	W	280 AA A	7.0	616	BSW
50		225/50ZR17	98	W	280 AA A	7.0	658	BSW
50		215/50ZR17	95	W	280 AA A	7.0	648	BSW
50		205/50ZR17	93	W	280 AA A	7.0	638	BSW
55		225/55ZR17	101	W	280 AA A	7.0	680	BSW
55		215/55ZR17	94	W	280 AA A	7.0	668	BSW
<b>16</b>		45	205/45ZR16	87	W	280 AA A	7.0	590
	45	195/45R16	84	V	280 AA A	7.0	582	BSW
	50	225/50ZR16	96	W	280 AA A	7.0	632	BSW
	50	205/50ZR16	91	W	280 AA A	7.0	612	BSW
	50	195/50R16	88	V	280 AA A	7.0	602	BSW
	55	225/55ZR16	99	W	280 AA A	7.0	654	BSW
	55	215/55ZR16	97	W	280 AA A	7.0	642	BSW
	55	205/55ZR16	94	W	280 AA A	7.0	632	BSW
	55	205/55R16	91	V	280 AA A	7.0	632	BSW
	55	195/55R16	91	V	280 AA A	7.0	620	BSW
	<b>15</b>	45	195/45R15	78	V	280 AA A	7.0	557
50		205/50R15	89	V	280 AA A	7.0	587	BSW
50		195/50R15	82	V	280 AA A	7.0	577	BSW
55		205/55R15	88	V	280 AA A	7.0	607	BSW
55		195/55R15	85	V	280 AA A	7.0	595	BSW

BSW Black Side Wall

# All Season

## ALL-SEASON CAPABILITY

New generation of touring tire providing you the required mileage, safety & comfortable driving with all-season capability



### FEATURES

New, Advanced tread compound

A series of circumferential, lateral grooves and multiple sipes

Stable pattern blocks and transverse grooves on tire shoulder

Optimized sequences and sizes of variable pitch

### BENEFITS

▶ Delivers outstanding wet and dry performance without compromising mileage

▶ Great hydroplaning resistance characteristics and provides the necessary grip and traction in the wet as well as in light snowy condition

▶ Provides stiffness to the pattern block allowing precise and responsive handling performance

▶ A quiet and comfort ride you will enjoy




Comfort



Standard



Symmetrical





All Season

All Season series : **55 60 65 70 75**



All Season series :  
**55 60 65 70 75**

# All Season

Inch	Series	Size	Load Index	Speed Rating	UTQG			Side Wall
						Tread Depth mm	Overall Diameter mm	
<b>16</b>	55	195/55R16	87	H	520AA	7.8	620	BSW
	55	205/55R16	91	H	520AA	7.9	632	BSW
	60	205/60R16	92	T	520AB	7.9	652	BSW
	60	215/60R16	95	T	520AB	8	664	BSW
	60	225/60R16	98	T	520AB	8.1	676	BSW
	65	215/65R16	98	T	520AB	8	686	BSW
<b>15</b>	60	185/60R15	84	T	520AB	7.8	603	BSW
	60	195/60R15	88	H	520AA	7.8	615	BSW
	60	205/60R15	91	H	520AA	7.9	627	BSW
	60	215/60R15	94	H	520AA	8	639	BSW
	60	215/60R15	94	T	520AB	8	639	BSW
	65	175/65R15	84	T	520AB	7.8	609	BSW
	65	185/65R15	88	H	520AA	7.8	621	BSW
	65	195/65R15	91	H	520AA	7.8	635	BSW
	65	205/65R15	94	H	520AA	7.9	647	BSW
	65	215/65R15	96	H	520AA	8	661	BSW
	65	215/65R15	96	T	520AB	8	661	BSW
	70	205/70R15	96	T	520AB	7.9	669	BSW
	70	215/70R15	98	T	520AB	8	683	BSW
	70	225/70R15	100	T	520AB	8.1	697	BSW
	75	205/75R15	97	T	520AB	7.9	689	BSW
	75	215/75R15	100	T	520AB	8	703	BSW
	75	215/75R15	100	S	520AB	8	703	BSW
	75	225/75R15	102	T	520AB	8.1	719	BSW
75	235/75R15	109	T	520AB	8.1	733	BSW	
<b>14</b>	60	185/60R14	82	H	520AA	7.8	578	BSW
	60	195/60R14	86	H	520AA	7.8	590	BSW
	65	175/65R14	82	T	520AB	7.8	584	BSW
	65	185/65R14	86	T	520AB	7.8	596	BSW
	70	175/70R14	84	T	520AB	7.8	602	BSW
	70	185/70R14	88	T	520AB	7.8	616	BSW
	70	195/70R14	91	H	520AA	7.8	630	BSW
	70	215/70R14	96	T	520AB	8	658	BSW
	75	185/75R14	89	T	520AB	7.8	634	BSW
	75	195/75R14	92	T	520AB	7.8	648	BSW
<b>13</b>	70	175/70R13	82	T	520AB	7.8	576	BSW
	70	185/70R13	86	T	520AB	7.8	590	BSW

# Valera Sport<sup>AS</sup>

## SPORT PERFORMANCE



### FEATURES

V-shaped tread design and two wide circumferential grooves

Optimized variable pitch tread design

Circumferential center rib

Rim protector


### BENEFITS

▶ Efficient water evacuation delivering outstanding wet handling performance

▶ Quiet and smooth ride under high speed driving conditions

▶ Enhanced lateral traction

▶ Protects wheels from curb damage




Sports



UHP



Handling



All Season





Valera Sport<sup>AS</sup> series : **35 40 45 50 55 60**

Valera Sport<sup>AS</sup> series :  
**35 40 45 50 55 60**

SPORT PERFORMANCE

**VALERA SPORT<sup>AS</sup>**

Inch	Series	Size	Load Index	Speed Rating	UTQG			Side Wall
						Tread Depth mm	Overall Diameter mm	
<b>19</b>	40	225/40ZR19	89	W	480AA	8.2	663	BSW
	40	245/40ZR19	94	W	480AA	8.2	679	BSW
	40	255/40ZR19	100	W	480AA	8.2	687	BSW
<b>18</b>	35	215/35ZR18	84	W	480AA	8.2	607	BSW
	40	225/40ZR18	92	W	480AA	8.2	637	BSW
	40	235/40ZR18	95	W	480AA	8.2	645	BSW
	40	245/40ZR18	97	W	480AA	8.2	653	BSW
	45	225/45ZR18	91	W	480AA	8.2	659	BSW
	45	245/45ZR18	100	W	480AA	8.2	677	BSW
	45	255/45ZR18	99	W	480AA	8.2	687	BSW
	50	225/50ZR18	95	W	480AA	8.2	683	BSW
	50	235/50ZR18	97	W	480AA	8.2	693	BSW
<b>17</b>	40	205/40ZR17	84	W	480AA	8.2	596	BSW
	40	245/40ZR17	91	W	480AA	8.2	628	BSW
	45	215/45ZR17	91	W	480AA	8.2	626	BSW
	45	225/45ZR17	94	W	480AA	8.2	634	BSW
	45	235/45ZR17	94	W	480AA	8.2	644	BSW
	45	245/45ZR17	95	W	480AA	8.2	652	BSW
	50	205/50ZR17	93	W	480AA	8.2	638	BSW
	50	215/50ZR17	95	W	480AA	8.2	648	BSW
	50	225/50ZR17	94	W	480AA	8.2	658	BSW
	55	215/55ZR17	94	W	480AA	8.2	668	BSW
	55	225/55ZR17	97	W	480AA	8.2	680	BSW
<b>16</b>	45	205/45ZR16	83	W	480AA	8.2	590	BSW
	50	205/50ZR16	87	W	480AA	8.2	612	BSW
	50	225/50ZR16	92	W	480AA	8.2	632	BSW
	50	245/50ZR16	97	W	480AA	8.2	652	BSW
	55	205/55ZR16	91	W	480AA	8.2	632	BSW
	55	225/55ZR16	95	W	480AA	8.2	654	BSW
	60	215/60ZR16	95	W	480AA	8.2	664	BSW
<b>15</b>	50	195/50ZR15	82	W	480AA	8.2	577	BSW
	50	205/50ZR15	89	W	480AA	8.2	587	BSW
	55	195/55ZR15	85	W	480AA	8.2	595	BSW
	55	205/55ZR15	88	W	480AA	8.2	607	BSW

BSW Black Side Wall

# PS880

## INCREDIBLE HANDLING



### FEATURES

Four enlarged circumferential main grooves design

Continuous center rib design

Advanced silica tread compound

Wide shoulder with limited grooves and sipe design

### BENEFITS

▶ Enhanced water drainage improves wet handling and minimizes hydroplaning

▶ Enhances straight driving performance and comfort

▶ Excellent grip in wet and dry conditions

▶ Improves cornering stability and provides a quieter and more comfortable ride




Comfort



Standard



Symmetrical



Summer



PS880 series : **50 55 60 65**

PS880 series :  
50 55 60 65

INCREDIBLE HANDLING

**PS880**

Inch	Series	Size	Load Index	Speed Rating	UTQG	Tread Depth mm	Overall Diameter mm	Side Wall	
17	55	235/55R17	99	H	380AA	8.2	690	BSW	
	16	55	185/55R16	83	V	320AA	7.8	610	BSW
		55	195/55R16	87	V	320AA	7.9	620	BSW
		55	205/55R16	91	V	320AA	8.0	632	BSW
		55	215/55R16	93	V	320AA	8.1	642	BSW
		55	225/55R16	95	V	320AA	8.1	654	BSW
		60	205/60R16	92	H	380AA	8.0	652	BSW
		60	215/60R16	95	V	320AA	8.1	664	BSW
		60	225/60R16	98	H	380AA	8.1	676	BSW
15	50	195/50R15	82	V	320AA	7.9	577	BSW	
	55	185/55R15	82	V	320AA	7.8	585	BSW	
	55	195/55R15	85	V	320AA	7.9	595	BSW	
	60	185/60R15	88	H	380AA	7.8	603	BSW	
	60	195/60R15	88	H	380AA	7.9	615	BSW	
	60	195/60R15	88	V	320AA	7.9	615	BSW	
	60	205/60R15	91	V	320AA	8.0	627	BSW	
	60	205/60R15	91	H	380AA	8.0	627	BSW	
	65	175/65R15	84	H	380AA	7.8	609	BSW	
	65	185/65R15	88	T	380AA	7.9	621	BSW	
	65	185/65R15	88	H	380AA	7.9	621	BSW	
	65	195/65R15	95	H	380AA	8.0	635	BSW	
	65	195/65R15	91	V	320AA	8.0	635	BSW	
	65	195/65R15	91	H	380AA	8.0	635	BSW	
	65	195/65R15	91	T	380AA	8.0	635	BSW	
	65	205/65R15	94	V	320AA	8.0	647	BSW	
	14	55	185/55R14	80	H	380AA	7.8	560	BSW
		60	165/60R14	75	H	380AA	7.6	554	BSW
60		185/60R14	82	H	380AA	7.8	578	BSW	
60		185/60R14	82	T	380AA	7.8	578	BSW	
60		195/60R14	86	H	380AA	7.9	590	BSW	
65		155/65R14	75	T	380AA	7.7	558	BSW	
65		165/65R14	79	T	380AA	7.7	570	BSW	
65		175/65R14	86	H	380AA	7.8	584	BSW	
65		175/65R14	82	T	380AA	7.8	584	BSW	
65		185/65R14	86	H	380AA	7.9	596	BSW	
65		185/65R14	86	T	380AA	7.9	596	BSW	
13		60	175/60R13	77	H	380AA	7.7	540	BSW
		65	155/65R13	73	T	380AA	7.7	532	BSW
	65	165/65R13	77	T	380AA	7.7	544	BSW	
	65	175/65R13	80	T	380AA	7.8	558	BSW	

# PS870

EVERYDAY COMFORT



## FEATURES

Advanced silica compound

► Improves braking and handling in wet and dry conditions

Continuous center rib design

► Enhances straight driving performance and comfort

Jointless overlay construction

► Enhances high speed stability and endurance

Special shoulder grooves and sipes design

► Delivers comfort for a quiet and secure ride





PS870 series : **70 80**

PS870 series :  
70 80

EVERYDAY COMFORT

**PS870**

Inch	Series	Size	Load Index	Speed Rating	UTQG	 Tread Depth mm	 Overall Diameter mm	Side Wall
<b>14</b>	70	165/70R14	85	T	460AA	7.5	588	BSW
	70	175/70R14	88	T	460AA	7.6	602	BSW
	70	185/70R14	88	H	460AA	7.7	616	BSW
	70	195/70R14	91	T	460AA	7.8	630	BSW
	80	175/80R14	88	H	460AA	7.7	636	BSW
<b>13</b>	70	145/70R13	71	T	460AA	7.3	534	BSW
	70	155/70R13	75	T	460AA	7.4	548	BSW
	70	165/70R13	79	T	460AA	7.5	562	BSW
	70	175/70R13	82	T	460AA	7.6	576	BSW
	70	175/70R13	82	T	460AA	7.6	576	WR
	70	185/70R13	86	T	460AA	7.7	590	BSW
	80	135/80R13	70	T	460AA	7.3	546	BSW
	80	145/80R13	75	T	460AA	7.4	562	BSW
	80	155/80R13	79	T	460AA	7.5	578	BSW
	80	165/80R13	83	T	460AA	7.6	594	BSW

BSW Black Side Wall WR White Ribbon

# Valera SUV

## HIGH PERFORMANCE SUV

VALERA SUV is designed to deliver outstanding handling and grip for high performance SUV/4X4 Vehicles



### FEATURES

Wide longitudinal grooves

Asymmetrical Pattern Design

Optimized variable-pitch tread block design

Wide Central circumference

### BENEFITS

- ▶ Efficient water evacuation, Excellent wet performance
- ▶ Ensure driving safer in wet and dry road surface
- ▶ lower noise and comfortable driving
- ▶ Ensures high speed stability and prevents irregular wear



SUV



Comfort



Asymmetrical



Water Evacuation



VALERA SPORT series : **40 45 50 55 60 65**







VALERA SUV series :  
**40 45 50 55 60 65**

HIGH PERFORMANCE SUV

# Valera SUV

Inch	Series	Size	Load Index	Speed Rating	UTQG			Side Wall
						Tread Depth mm	Overall Diameter mm	
<b>20</b>	40	275/40R20	106	Y	280AA	8.2	728	BSW
<b>19</b>	45	275/45R19	108	W	280AA	8.2	731	BSW
	50	255/50R19	107	W	280AA	8.2	739	BSW
<b>18</b>	55	235/55R18	104	W	280AA	8.2	715	BSW
	55	255/55R18	109	W	280AA	8.2	737	BSW
	60	235/60R18	107	W	280AA	8.2	739	BSW
<b>17</b>	55	235/55R17	103	V	280AA	8.2	690	BSW
	60	215/60R17	100	V	280AA	8.2	690	BSW
	65	225/65R17	102	V	280AA	8.2	724	BSW
	65	235/65R17	108	W	280AA	8.2	738	BSW
	65	245/65R17	107	V	280AA	8.2	750	BSW

BSW Black Side Wall

# Valera AT

## ALL-TERRAIN

All Terrain tire for SUV and light truck with all round capability on and off road.



### FEATURES

Five longitudinal blocks

Uniquely shoulder block design

The chamfered grooves with 3D design

Interlocked tread blocks

### BENEFITS

▶ Provides excellent traction for all terrain and all seasons

▶ Provide traction in mud and slush

▶ Eject stones to improve tire life and maintain good tractions


▶ Improve tread stiffness for stable handling and braking, and without compromise in wet performance



All Terrain



Symmetrical





All Season



VALERA AT series : **55 60 65 70 75 80**

VALERA AT series :  
**55 60 65 70 75 80**

# Valera AT

Inch	Series	Size	Load Index	Speed Rating	UTQG			Side Wall
						Tread Depth mm	Overall Diameter mm	
<b>20</b>	55	P275/55R20	111	T	520AB	10.6	810	BSW
	60	P275/60R20	114	T	520AB	10.6	838	BSW
<b>18</b>	60	P265/60R18	109	T	520AB	10.6	775	OWL
	65	P265/65R18	112	S	520AB	10.6	801	OWL
	65	LT275/65R18	123/120	S	-	12.6	815	OWL
	65	P275/65R18	114	T	520AB	10.6	815	OWL
	65	LT285/65R18	125/122	S	-	12.6	827	OWL
	70	P255/70R18	112	T	520AB	10.6	815	OWL
	70	P265/70R18	114	S	520AB	10.6	829	OWL
	70	LT275/70R18	125/122	S	-	12.6	843	OWL
<b>17</b>	65	P245/65R17	105	T	520AB	10.6	750	BSW
	65	P255/65R17	108	S	520AB	10.6	764	OWL
	65	P265/65R17	110	T	520AB	10.6	776	OWL
	70	P235/70R17	108	S	520AB	10.6	762	BSW
	70	LT245/70R17	119/116	S	-	12.6	776	OWL
	70	P245/70R17	108	T	520AB	10.6	776	BSW
	70	P255/70R17	110	S	520AB	10.6	790	OWL
	70	LT265/70R17	121/118	S	-	12.6	804	BSW
	70	P265/70R17	113	T	520AB	10.6	804	BSW
	70	LT285/70R17	121/118	S	-	12.6	832	OWL
	70	P285/70R17	117	T	520AB	10.6	832	OWL
	75	P235/75R17	108	S	520AB	10.6	784	OWL
	75	LT245/75R17	121/118	S	-	12.6	800	BSW
	80	LT235/80R17	120/117	S	-	12.6	808	BSW
	<b>16</b>	70	P235/70R16	104	T	520AB	10.6	736
70		P245/70R16	106	T	520AB	10.6	750	BSW
70		P255/70R16	109	T	520AB	10.6	764	OWL
70		P265/70R16	111	T	520AB	10.6	778	BSW
75		LT225/75R16	115/112	S	-	12.6	744	BSW
75		LT245/75R16	120/116	S	-	12.6	774	BSW
75		P245/75R16	109	T	520AB	10.6	774	OWL
75		LT265/75R16	123/120	S	-	12.6	804	BSW
75		P265/75R16	114	T	520AB	10.6	804	OWL
75		LT285/75R16	126/123	R	-	12.6	834	OWL
<b>15</b>	75	P235/75R15	108	T	520AB	10.6	733	BSW
		31×10.50R15LT	109	S	-	12.6	775	BSW

BSW Black Side Wall    OWL Outline White Letter

# Valera HT

ENJOY LIFE'S EVERYDAY EXPEDITIONS



## FEATURES

Four wide circumferential grooves

Continuous center rib design

Advanced variable pitch tread design

Extended shoulder grooves

## BENEFITS

▶ Effective water evacuation ensuring optimum all weather performance

▶ Enhances straight driving performance and comfort

▶ Quiet and smooth ride even under high speed driving conditions


▶ Excellent cornering stability



Highway Terrain



Symmetrical



All Season



Handling



Water Evacuation



VALERA HT series : **45 55 60 65 70 75 80 85**

VALERA HT series :  
**45 55 60 65 70 75 80 85**

ENJOY LIFE'S EVERYDAY  
 EXPEDITIONS

**Valera HT**

Inch	Series	Size	Load Index	Speed Rating	UTQG	Tread Depth mm	Overall Diameter mm	Side Wall
<b>20</b>	45	275/45R20	110	H	520AB	8.2	756	BSW
	55	P255/55R20	107	H	520AB	8.2	788	BSW
	55	P275/55R20	111	H	520AB	8.2	810	BSW
	60	P275/60R20	114	T	520AB	8.2	838	BSW
<b>19</b>	55	P245/55R19	103	S	520AB	8.2	753	BSW
	60	P255/60R19	108	H	520AB	8.2	789	BSW
<b>18</b>	55	255/55R18	109	H	520AB	8.2	737	BSW
	60	235/60R18	103	H	520AB	8.2	739	BSW
	60	245/60R18	105	H	520AB	8.2	751	BSW
	60	P265/60R18	109	T	520AB	8.2	775	OWL
	65	P235/65R18	104	T	520AB	8.2	763	OWL
	65	P265/65R18	112	S	520AB	8.2	801	OWL
	65	P275/65R18	114	T	520AB	8.2	815	OWL
	70	P255/70R18	112	T	520AB	8.2	815	OWL
	70	P265/70R18	114	S	520AB	8.2	829	OWL
	<b>17</b>	65	225/65R17	102	H	520AB	8.2	724
65		P235/65R17	103	T	520AB	8.2	738	BSW
65		P245/65R17	105	S	520AB	8.2	750	OWL
65		P255/65R17	108	S	520AB	8.2	764	OWL
65		P265/65R17	110	T	520AB	8.2	776	BSW
65		P275/65R17	113	T	520AB	8.2	790	OWL
70		P235/70R17	108	S	520AB	8.2	762	OWL
70		LT245/70R17	119/116	S	-	10.2	776	OWL
70		P245/70R17	108	S	520AB	8.2	776	OWL
70		P255/70R17	110	S	520AB	8.2	790	OWL
70		LT265/70R17	121/118	R	-	10.2	804	OWL
70		P265/70R17	113	T	520AB	8.2	804	OWL
70		LT285/70R17	121/118	R	-	10.2	832	OWL
75		P235/75R17	108	S	520AB	8.2	784	OWL
75		LT245/75R17	121/118	R	-	10.2	800	BSW
80	LT235/80R17	120/117	R	-	10.2	808	BSW	
<b>16</b>	60	235/60R16	100	H	520AB	8.2	688	BSW
	65	215/65R16	102	H	520AB	8.2	686	BSW
	70	P215/70R16	99	S	520AB	8.2	708	BSW
	70	P225/70R16	101	S	520AB	8.2	722	OWL
	70	P235/70R16	104	T	520AB	8.2	736	OWL
	70	P245/70R16	106	S	520AB	8.2	750	OWL
	70	P255/70R16	109	S	520AB	8.2	764	OWL
	70	P265/70R16	111	S	520AB	8.2	778	OWL
	75	LT225/75R16	115/112	R	-	10.2	744	BSW
	75	P235/75R16	109	S	520AB	8.2	758	OWL
	75	LT245/75R16	120/116	R	-	10.2	774	OWL
	75	P245/75R16	109	S	520AB	8.2	774	OWL
	75	LT265/75R16	123/120	R	-	10.2	804	OWL
	75	P265/75R16	114	S	520AB	8.2	804	OWL
	75	LT285/75R16	126/123	R	-	10.2	834	OWL
	85	LT215/85R16	115/112	R	-	10.2	772	BSW
	85	LT235/85R16	120/116	R	-	10.2	806	BSW
<b>15</b>	70	205/70R15	96	H	520AB	8.2	669	BSW
	75	P235/75R15	105	T	520AB	8.2	733	OWL
		31x10.50R15LT	109	R	-	10.2	775	OWL

BSW Black Side Wall    OWL Outline White Letter

# PV600

MAXIMUM LOAD AND  
OPTIMUM MILEAGE



## FEATURES

Optimised variable pitch pattern design

Extra-Endurance technology

Super hard bead filler

## BENEFITS

- ▶ Delivers a quiet ride
- ▶ Enables higher load potential and improves safety margins
- ▶ Enhances high speed stability and improves steering response





PV600 series : **60 65 70 75**



PV600 series :  
**60 65 70 75**

**MAXIMUM LOAD AND  
OPTIMUM MILEAGE**

**PV600**

Inch	Series	Size	Load Index	Speed Rating	UTQG			Side Wall
						Tread Depth mm	Overall Diameter mm	
<b>16</b>	60	195/60R16CLT	99/97	H	-	9.5	640	BSW
	65	195/65R16CLT	104/102	T	-	9.5	660	BSW
	65	205/65R16CLT	107/105	T	-	9.5	672	BSW
	65	215/65R16CLT	109/107	R	-	9.5	686	BSW
	65	225/65R16CLT	112/110	T	-	10.1	698	BSW
	75	175/75R16CLT	101/99	R	-	9.1	668	BSW
	75	185/75R16CLT	104/102	R	-	9.3	684	BSW
	75	195/75R16CLT	107/105	R	-	9.5	698	BSW
	75	205/75R16CLT	110/108	R	-	10.2	714	BSW
	75	215/75R16CLT	116/114	R	-	9.9	728	BSW
	75	225/75R16CLT	118/116	R	-	10.1	744	BSW
<b>15</b>	65	205/65R15CLT	102/100	T	-	9.7	647	BSW
	70	195/70R15CLT	104/102	R	-	9.5	655	BSW
	70	205/70R15CLT	106/104	R	-	9.7	669	BSW
	70	215/70R15CLT	109/107	S	-	9.9	683	BSW
	70	225/70R15CLT	112/110	R	-	10.1	697	BSW
<b>14</b>	65	175/65R14CLT	90/88	T	-	9.1	584	BSW
	70	165/70R14CLT	89/87	R	-	8.9	588	BSW
	75	215/75R14CLT	112/110	R	-	9.9	678	BSW
		185R14CLT	102/100	R	-	9.3	650	BSW
		195R14CLT	106/104	R	-	9.5	666	BSW

BSW Black Side Wall

## PCR Rim Series

Series	Dimension	SPORT 910	ALL SEASON	VALERA Sport <sup>A5</sup>	PS880	PS870
35	255/35ZR20	97W				
35	235/35ZR19	91W				
35	245/35ZR19	93W				
35	215/35ZR18			84W		
35	255/35ZR18	94W				
40	225/40ZR19			89W		
40	245/40ZR19			94W		
40	255/40ZR19			100W		
40	225/40ZR18	92W		92W		
40	235/40ZR18	95W		95W		
40	245/40ZR18	97W		97W		
40	205/40ZR17	84W		84W		
40	215/40ZR17	87W				
40	245/40ZR17	91W		91W		
45	225/45ZR18	95W		91W		
45	245/45ZR18	100W		100W		
45	255/45ZR18			99W		
45	205/45ZR17	88W				
45	215/45ZR17	91W		91W		
45	225/45ZR17	94W		94W		
45	235/45ZR17	97W		94W		
45	245/45ZR17	99W		95W		
45	195/45R16	84V				
45	205/45ZR16	87W		83W		
45	195/45R15	78V				
50	225/50ZR18			95W		
50	235/50ZR18			97W		
50	205/50ZR17	93W		93W		
50	215/50ZR17	95W		95W		
50	225/50ZR17	98W		94W		
50	195/50R16	88V				
50	205/50ZR16	91W		87W		
50	225/50ZR16	96W		92W		
50	245/50ZR16			97W		
50	195/50R15	82V			82V	
50	195/50ZR15			82W		
50	205/50R15	89V				
50	205/50ZR15			89W		
55	215/55ZR17	94W		94W		
55	225/55ZR17	101W		97W		
55	235/55R17				99H	
55	185/55R16				83V	
55	195/55R16	91V	87H		87V	
55	205/55R16	91V	91H		91V	
55	205/55ZR16	94W		91W		
55	215/55R16				93V	
55	215/55ZR16	97W				
55	225/55R16				95V	
55	225/55ZR16	99W		95W		
55	185/55R15				82V	
55	195/55R15	85V			85V	
55	195/55ZR15			85W		
55	205/55R15	88V				



## PCR Rim Series

Series	Dimension	SPORT 910	ALL SEASON	VALERA Sport <sup>AS</sup>	PS880	PS870
55	205/55ZR15			88W		
55	185/55R14				80H	
60	205/60R16		92T		92H	
60	215/60R16		95T		95V	
60	215/60ZR16			95W		
60	225/60R16		98T		98H	
60	185/60R15		84T		88H	
60	195/60R15		88H		88H88V	
60	205/60R15		91H		91H91V	
60	215/60R15		94T			
60	165/60R14				75H	
60	185/60R14		82H		82T82H	
60	195/60R14		86H		86H	
60	175/60R13				77H	
65	215/65R16		98T			
65	175/65R15		84T		84H	
65	185/65R15		88H		88T88H	
65	195/65R15		91H		91T 91H 91V 95H	
65	205/65R15		94H		94V	
65	215/65R15		96T			
65	155/65R14				75T	
65	165/65R14				79T	
65	175/65R14		82T		82T86H	
65	185/65R14		86T		86T86H	
65	155/65R13				73T	
65	165/65R13				77T	
65	175/65R13				80T	
70	205/70R15		96T			
70	215/70R15		98T			
70	225/70R15		100T			
70	165/70R14					85T
70	175/70R14		84T			88T
70	185/70R14		88T			88H
70	195/70R14		91H			91T
70	P205/70R14		93T			
70	215/70R14		96T			
70	145/70R13					71T
70	155/70R13					75T
70	165/70R13					79T
70	175/70R13		82T			82T
70	185/70R13		86T			86T
75	205/75R15		97T			
75	215/75R15		100S			
75	225/75R15		102T			
75	235/75R15		109T			
75	185/75R14		89T			
75	195/75R14		92T			
75	205/75R14		95T			
75	215/75R14		100T			
80	175/80R14					88H
80	135/80R13					70T
80	145/80R13					75T
80	155/80R13		79T			79T
80	165/80R13					83T


## SUV VAN Rim Series

Series	Dimension	VALERA SUV	Valera AT	VALERA HT	PV600	PV600
40	275/40R20	106Y				
45	275/45R20			110H		
45	275/45R19	108W				
50	255/50R19	107W				112/110R
55	P255/55R20			107H		
55	P275/55R20		111T	111H		
55	P245/55R19			103S		101/99R
55	235/55R18	104W				104/102R
55	255/55R18	109W		109H		107/105R
55	235/55R17	103V				110/108R
60	P275/60R20		114T	114T		116/114R
60	P255/60R19			108H		
60	235/60R18	107W		103H		118/116R
60	245/60R18			105H		
60	P265/60R18		109T	109T		
60	215/60R17	100V				
60	195/60R16CLT				99/97H	
60	235/60R16			100H		
65	P235/65R18			104T		
65	P265/65R18		112S	112S		
65	P275/65R18		114T	114T		
65	LT275/65R18		123/120S			
65	LT285/65R18		125/122S			
65	225/65R17	102V		102H		
65	235/65R17	108W				
65	P235/65R17			103T		
65	245/65R17	107V				
65	P245/65R17		105T	105S		102/100R
65	P255/65R17		108S	108S		106/104R
65	P265/65R17		110T	110T		
65	P275/65R17			113T		
65	195/65R16CLT				104/102T	
65	205/65R16CLT				107/105T	
65	215/65R16			102H		
65	215/65R16CLT				109/107R	
65	225/65R16CLT				112/110T	
65	205/65R15CLT				102/100T	
65	175/65R14CLT				90/88T	
70	P255/70R18		112T	112T		
70	P265/70R18		114S	114S		
70	LT275/70R18		125/122S			
70	P235/70R17		108S	108S		
70	LT245/70R17		119/116S	119/116S		
70	P245/70R17		108T	108S		
70	P255/70R17		110S	110S		
70	LT265/70R17		121/118S	121/118R		
70	P265/70R17		113T	113T		
70	LT285/70R17		121/118S	121/118R		
70	P285/70R17		117T			
70	P215/70R16			99S		
70	P225/70R16			101S		
70	P235/70R16		104T	104T		

## SUV VAN Rim Series

Series	Dimension	VALERA SUV	Valera AT	VALERA HT	PV600	PV600
70	P245/70R16		106T	106S		
70	P255/70R16		109T	109S		
70	P265/70R16		111T	111S		
70	195/70R15CLT				104/102R	
70	205/70R15			96H		
70	205/70R15CLT				106/104R	
70	215/70R15CLT				109/107S	
70	225/70R15CLT				112/110R	
70	165/70R14CLT				89/87R	
75	P235/75R17		108S	108S		
75	LT245/75R17		121/118S	121/118R		
75	175/75R16CLT				101/99R	
75	185/75R16CLT				104/102R	
75	195/75R16CLT				107/105R	
75	205/75R16CLT				110/108R	
75	215/75R16CLT				116/114R	
75	225/75R16CLT				118/116R	
75	LT225/75R16		115/112S	115/112R		
75	P235/75R16			109S		
75	LT245/75R16		120/116S	120/116R		
75	P245/75R16		109T	109S		
75	LT265/75R16		123/120S	123/120R		
75	P265/75R16		114T	114S		
75	LT285/75R16		126/123R	126/123R		
75	P235/75R15		108T	105T		
75	215/75R14CLT				112/110R	
80	LT235/80R17		120/117S	120/117R		
85	LT215/85R16			115/112R		
85	LT235/85R16			120/116R		
	31×10.50R15LT		109S	109R		
	185R14CLT				102/100R	
	195R14CLT				106/104R	

# DESIGNATIONS, LOADS AND SPEED INDEX

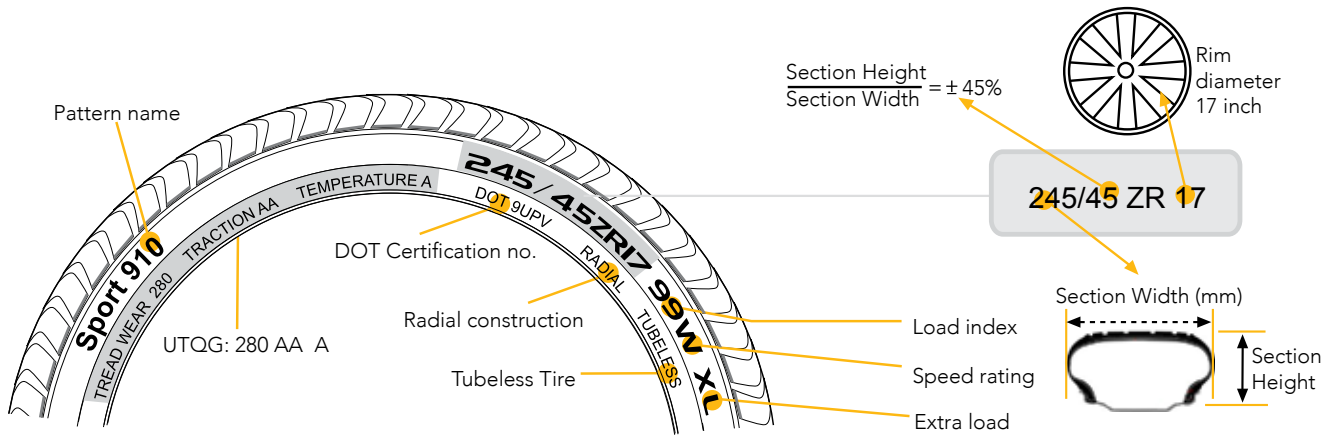

Speed symbols  
Maximum speed

SI	KmH
L	120
M	130
N	140
P	150
Q	160
R	170
S	180
T	190
U	200
H	210
V	240
W	270
Y	300

Load Capacity Index

LI	Kg	LI	Kg	LI	Kg	LI	Kg
55	218	79	437	101	825	123	1550
58	218	80	450	102	850	124	1600
59	243	81	462	103	875	125	1650
60	250	82	485	104	900	126	1700
61	257	83	487	105	925	127	1750
62	265	84	500	106	950	128	1800
63	272	85	515	107	975	129	1850
64	280	86	530	108	1000	130	1900
65	290	87	545	109	1030	131	1950
66	300	88	560	110	1060	132	2000
67	307	89	580	111	1090	133	2060
68	315	90	600	112	1120	134	2120
69	325	91	615	113	1150	135	2180
70	335	92	630	114	1180	136	2240
71	345	93	650	115	1215	137	2300
72	355	94	670	116	1250	138	2360
73	365	95	690	117	1285	139	2430
74	375	96	710	118	1320	140	2500
75	387	97	730	119	1360		
76	400	98	750	120	1400		
77	412	99	775	121	1450		
78	425	100	800	122	1500		

NOTE

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---





# PRIMEWELL



Whether you are looking for performance car, passenger vehicle, or commercial van tire, we've got the product to suit your lifestyle